

Please type a plus sign (+) inside this box → ☐

PTO/SB/05 (4/98)
Approved for use through 09/30/2000. OMB 0651-0032
Patent and Trademark Office, U.S. DEPARTMENT OF COMMERCE

Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it displays a valid OMB control number

UTILITY PATENT APPLICATION TRANSMITTAL

(Only for new nonprovisional applications under 37 C.F.R. § 1.53(b))

Attorney Docket No. 503.38156X00

First Inventor or Application Identifier Ken YOSHIOKA

Title See 1 in Addendum

Express Mail Label No.

APPLICATION ELEMENTS

See MPEP chapter 600 concerning utility patent application contents.

1. ☒ * Fee Transmittal Form (e.g., PTO/SB/17)
(Submit an original and a duplicate for fee processing)
2. ☒ Specification [Total Pages 43]
(preferred arrangement set forth below)
- Descriptive title of the Invention
- Cross References to Related Applications
- Statement Regarding Fed sponsored R & D
- Reference to Microfiche Appendix
- Background of the Invention
- Brief Summary of the Invention
- Brief Description of the Drawings (if filed)
- Detailed Description
- Claim(s)
- Abstract of the Disclosure
3. ☒ Drawing(s) (35 U.S.C. 113) [Total Sheets 9]
4. Oath or Declaration [Total Pages 2]
a. ☒ Newly executed (original or copy)
b. ☐ Copy from a prior application (37 C.F.R. § 1.63(d))
(for continuation/divisional with Box 16 completed)
i. ☐ DELETION OF INVENTOR(S)
Signed statement attached deleting
inventor(s) named in the prior application,
see 37 C.F.R. §§ 1.63(d)(2) and 1.33(b).

* NOTE FOR ITEMS 1 & 13 IN ORDER TO BE ENTITLED TO PAY SMALL ENTITY FEES, A SMALL ENTITY STATEMENT IS REQUIRED (37 C.F.R. § 1.27), EXCEPT IF ONE FILED IN A PRIOR APPLICATION IS RELIED UPON (37 C.F.R. § 1.28).

5. ☐ Microfiche Computer Program (Appendix)
6. Nucleotide and/or Amino Acid Sequence Submission
(if applicable, all necessary)
a. ☐ Computer Readable Copy
b. ☐ Paper Copy (identical to computer copy)
c. ☐ Statement verifying identity of above copies

ACCOMPANYING APPLICATION PARTS

7. ☒ Assignment Papers (cover sheet & document(s))
8. ☐ 37 C.F.R. § 3.73(b) Statement (when there is an assignee) ☒ Power of Attorney
9. ☐ English Translation Document (if applicable)
10. ☐ Information Disclosure Statement (IDS)/PTO-1449 ☐ Copies of IDS Citations
11. ☐ Preliminary Amendment
12. ☒ Return Receipt Postcard (MPEP 503)
(Should be specifically itemized)
13. ☐ * Small Entity Statement(s) ☐ Statement filed in prior application (PTO/SB/09-12) ☐ Status still proper and desired
14. ☒ Certified Copy of Priority Document(s)
(if foreign priority is claimed)
15. ☒ Other: List and Copies of Prior Art References

16. If a CONTINUING APPLICATION, check appropriate box, and supply the requisite information below and in a preliminary amendment:

☐ Continuation ☐ Divisional ☐ Continuation-in-part (CIP) of prior application No. /
Prior application information: Examiner Group / Art Unit:

For CONTINUATION or DIVISIONAL APPS only: The entire disclosure of the prior application, from which an oath or declaration is supplied under Box 4b, is considered a part of the disclosure of the accompanying continuation or divisional application and is hereby incorporated by reference. The incorporation can only be relied upon when a portion has been inadvertently omitted from the submitted application parts.

17. CORRESPONDENCE ADDRESS

☒ Customer Number or Bar Code Label 020457 or ☐ Correspondence address below
(Insert Customer No. or Attach bar code label here)

Name				
Address				
City	State	Zip Code		
Country	Telephone	Fax		

Name (Print/Type)	William I. Solomon	Registration No. (Attorney/Agent)	28,565
Signature	<i>William I. Solomon</i>	Date	1-28-00

Burden Hour Statement. This form is estimated to take 0.2 hours to complete. Time will vary depending upon the needs of the individual case. Any comments on the amount of time you are required to complete this form should be sent to the Chief Information Officer, Patent and Trademark Office, Washington, DC 20231. DO NOT SEND FEES OR COMPLETED FORMS TO THIS ADDRESS. SEND TO: Assistant Commissioner for Patents, Box Patent Application, Washington, DC 20231

A METHOD OF PROCESSING SPECIMENS, AN APPARATUS THEREFOR AND A
METHOD OF MANUFACTURE OF A MAGNETIC HEAD

BACKGROUND OF THE INVENTION

5 The present invention relates to a method of processing specimens by plasma etching, an apparatus therefor and a method of manufacture of a magnetic head using the same.

10 A specimen such as a substrate of a semiconductor device is subjected to etching processing, for example, using a chemical solution or by plasma etching. In such etching processing of the specimen, adequate care must be taken against corrosion of the specimen after etching processing.

15 As such prior art anti-corrosion technique after etching processing of the specimen, there is known, for example, JP-A Laid-Open No. 59-186326 wherein a residual chlorine compound which is a corrosive substance remaining in a resist film and the like is oxidized by ashing process for ashing the resist film using plasma in a plasma processing chamber which is connected to an etching chamber and is maintained in vacuum. Further, it is also
20 known that by heating the specimen after etching process to a temperature above 200°C, evaporation of a residual chlorine substance which is corrosive material is promoted, thereby preventing corrosion of the substance after the etching process. Still another prior art is disclosed in JP-A Laid-Open No.
25 61-133388, wherein a specimen to be treated after its etching process is taken out of an etching chamber, transferred to a heat treatment chamber, dried by a heated air, and then is taken out

of the heat treatment chamber to be rinsed and dried, thereby attempting to prevent corrosion of the specimen due to reaction with atmosphere after its etching process.

JP-A Laid-Open No. 2-224233 discloses a method of processing specimens, comprising: a first step of processing a specimen of lamination which includes metals each having a different ionization tendency by gas plasma etching using a first gas plasma via a resist mask formed on the lamination in a first processing chamber; a second step of processing the specimen using a second gas plasma which is formed in a gas atmosphere different from the first gas plasma in a second processing chamber, for removing the resist mask and residual corrosive substances formed in the first step and deposited on a surface of side walls of the lamination including different ionization metals; and a third step of rinsing the surface of the specimen which is exposed by the first and the second steps with at least one liquid for removing a remaining part of the residual corrosive substances deposited on the side wall of the lamination which could not have been removed by the second step, wherein in the first step, the specimen formed by laminating Al alloy film and TiW or TiN film is subjected to etching process via a resist mask in vacuum using gas plasma which contains chlorine; in the second step, the specimen is subjected to ashing process using gas plasma which contains chlorine; and in the third step, the specimen is rinsed in water, and wherein the third step is comprised either one of the following four steps in order to remove a residual corrosive product remaining after the first step: (a) rinsing in water; (b) rinsing in water after

rinsing in alkaline liquid; (c) rinsing in water after rinsing in acid liquid; and (d) rinsing in water after rinsing in fluorine nitric acid.

A prior art method of etching a material for use in a thin film magnetic head, magnetic sensor and the like which contains Fe is disclosed in JP-A-4-107281. This method of etching the material which contains Fe is directed to etching such a material as Fe-containing alloy formed on a surface of the specimen, and in particular, as Fe-Si-Al alloy, and is comprised of the steps of: etching the specimen by reactive ion milling in chlorine gas by heating the specimen above 250°C and below a melting point thereof in vacuum; a post treatment process for causing a residual substance remaining on the surface of the specimen completely to react with the chlorine gas by holding the specimen at a temperature above 250°C and by applying a chlorine ion shower to the specimen; and a pure water treatment process for dissolving and removing an etching product produced in the post treatment process by holding the specimen in pure water, wherein these steps are executed in this sequence of order as described above.

However, there is a problem associated with the prior art of JP-A-Publication No.4-107281 that when etching pure Fe, for example, of 3μm thick by argon ion milling for constructing a magnetic head, because of its etching rate being approximately 150Å/min., its etching time takes as long as 200 min. This is because that the number of ions of incidence controls its etching rate. Therefore, in order to improve its etching rate, the specimen is heated above 250°C, and the reactive ion milling

method is applied in atmosphere of chlorine gas in JP-A Laid-Open No. 4-107281, thereby improving the etching rate approximately to a level of 1000A/min. However, there arise such problems that depending on a type of specimen, it cannot withstand
5 a temperature above 250°C, thereby preventing application of the above-mentioned method in such a case. In particular, in the case of etching of a lamination film which includes a ferromagnetic material such as NiFe alloy which is used in manufacture of a magnetic head, if a temperature of its specimen rises above 230°C,
10 a magnetic property of NiFe film is deteriorated such that it cannot be recovered even when its temperature returns to normal, or that a re-magnetization process is required for recovering the initial magnetic property.

Further, in JP-A Laid-Open No. 4-107281, because the
15 specimen tends to corrode when left in atmosphere after the reactive ion milling, a corrosion prevention process is proposed, which includes a post treatment step for applying chlorine ion shower to the specimen which is kept at a high temperature above 250°C and a pure water treatment step for submerging the specimen
20 in pure water after the post treatment. However, there are such problems that a temperature above 250°C is required for the specimen once again, and that a complicated corrosion prevention sequence of the ion shower step followed by the pure water submersion step is required, thereby increasing the cost.

25 The above-mentioned complicated corrosion prevention procedure is considered to be necessary because that its target specimen which is Fe-Si-Al alloy contains two different metals

having a largely different ionization tendency from each other, and therefore, is highly corrosive as described in JP-A Laid-Open No. 2-224233.

Further, the lamination film thereof as formed and to be
5 processed in manufacture of the magnetic head generally includes an oxide film of NiFe alloy, alumina, silicon oxide or the like, thereby allowing for a reaction product resulting from etching of these films by milling, plasma etching or the like to deposit on the surface of side walls of the etched lamination. This deposit
10 film on the sidewalls causes a problem when etching the lamination continuously by impeding a subsequent etching process thereby rendering it difficult to carry out a vertical processing.

SUMMARY OF THE INVENTION

15 An object of the invention is to provide for a method of processing a specimen of lamination film which includes Ni-Fe alloy, featuring that the lamination can be etched at an improved etching rate and at a low temperature which prevents break-down of the device, that a simple and low cost corrosion prevention
20 treatment is provided, and at the same time that the deposition film on the side walls can be efficiently removed thereby ensuring the continuous and vertical etching of the lamination to be carried out, and to provide for an apparatus therefor and also a method of manufacture of a magnetic head using the same.

25 The feature of the present invention resides in combining a step of plasma etching of a specimen such as a magnetic pole of a magnetic head, which is formed of Ni-Fe alloy, using a

relatively high density plasma source and a gas which contains chlorine and/or fluorine nitric acid, and a step of rinsing in liquid and drying immediately to be carried out after the etching processing.

5 The above-mentioned high density plasma source refers to an induction coupling type plasma apparatus, helicon type plasma apparatus, two-frequency excitation parallel plane type plasma apparatus, microwave type plasma apparatus and the like, which can generate plasma having a saturated ion current density of
10 approximately 1-10 mA/cm². This type of apparatus has a plasma density as high as 10 to 100 times compared to low density plasma of prior art milling and parallel plane type apparatuses. Further, in these types of high density plasma sources, another high frequency power source separate from the high frequency power
15 source for plasma generation is provided for the specimen stage, which can be controlled independently of an ion energy of incidence on the specimen. When this plasma source is applied, because of an increased number of ions of incidence, even if setting of ion energy of incidence is decreased as low as to a
20 value of 50-500 eV, that is, 1/2 to one tenth of the values for the milling method, and the temperature of the specimen is decreased, a high etching rate becomes possible. For example, at a temperature of 40°C of the specimen and at ion energy of 300 eV, an etching rate of 100 nm/min can be realized. If the
25 temperature of specimen is in the range of 40 to 60°C, there is another advantage that the design of the specimen stage can be simplified contributing to the reduction of cost.

Further, because of a shallow penetration depth of bombarded chlorine ions into Ni-Fe alloy layer due to a low bombardment ion energy in the high density plasma processing of the invention, and because that Ni and Fe are identical metals having an identical ionization tendency which is immune to the corrosion mechanism due to different ionization tendencies as described above, which allows for a corrosion prevention to be realized by simply removing residual chlorine components deposited on the surface layer of the specimen, thereby providing for a simple and low cost corrosion prevention means of the invention.

Still further, the lamination layer which is prepared for manufacture of a magnetic head includes, in addition to the Ni-Fe alloy layer, various other layers such as an oxide layer of alumina or silicon oxide, photo resist layer and the like, which must be processed by etching using high density plasma. During these etching processing of the lamination layer, there occurs that the Ni-Fe alloy layer is exposed to plasma from the under-layer, or that using the Ni-Fe alloy layer itself as a mask, the oxide film layer or the like is etched, in this instance also, Ni-Fe alloy layer is exposed to a chlorine or fluorine plasma atmosphere, thereby needing a post etching treatment for corrosion prevention of the specimen. The corrosion prevention treatment by means of liquid rinsing according to the invention is effective to these etching steps described above.

Furthermore, during etching of the lamination layer for manufacture of a magnetic head, a reaction product tends to

deposit on both sidewalls of the lamination layer to be etched. Therefore, there arises a problem that this reaction product deposited on the both sidewalls prevents a subsequent etching process from being continued thereby impeding the continuous and vertical etching of the lamination layer. However, according to the invention, this reaction product deposits can be removed easily by the liquid rinsing treatment immediately after etching. Therefore, if an etching unit and a liquid rinsing/drying unit are provided in combination in one apparatus allowing for their continuous operation and treatment, and if this liquid rinsing treatment is inserted between each etching processing, an efficient and continuous etching can be achieved in one single apparatus.

More specifically, the instant invention provides for the following methods and apparatuses therefor.

The invention provides for a method of processing a specimen of lamination layer which includes at least one layer of Ni-Fe alloy or Ni-Fe-Co alloy formed on a substrate, comprising: a first step for etching the lamination layer by gas plasma with a gas which contains chlorine at a temperature of the specimen below 200°C in an etching chamber; a second step of removing a residual chlorine compound which is deposited on a sidewall of the lamination layer which is exposed by the first step, by rinsing the same in at least one liquid; and a third step of drying the side wall thereof after rinsing.

The invention, further, provides for the method of processing the specimen according to the above, wherein the second

step is executed continuously after the first step.

The invention provides for the method of processing the specimen, wherein the gas plasma is produced using at least one species of gas selected from the group consisting of Cl_2 , BCl_3 ,
5 Ar and O_2 , or in combination thereof.

The invention, further, provides for the method of processing the specimen, wherein the second step of liquid rinsing is comprised of one or more of the following steps:

- (A) a pure water rinsing;
- 10 (B) water rinsing after alkaline liquid rinsing;
- (C) water rinsing after acid liquid rinsing;
- (D) water rinsing after fluorine nitric acid rinsing (resist developer solution TMAH); and
- (E) water rinsing after neutral detergent cleaning.

15

Further, the invention provides for the method of processing the specimen, wherein the third step of drying is executed at a temperature below 200°C .

Still further, the invention provides for the method of
20 processing the specimen, wherein the liquids used are controlled of their temperatures.

Furthermore, the invention provides for the method of processing the specimen, wherein the lamination layer of the specimen includes as other layers at least one of the following
25 layers which are to be subjected to gas plasma etching in the processing chamber:

- (A) a photo resist layer;

- (B) alumina (Al_2O_3) layer;
- (C) silicon oxide layer;
- (D) Cu layer; and
- (E) Ta layer.

5

Furthermore, the invention provides for the method of processing the specimen, wherein the substrate is Al_2O_3 /TiC substrate, on which substrate Ni-Fe alloy or Ni-Fe-Co alloy layer is formed, which is etched by gas plasma in the processing chamber.

10

The invention provides for an apparatus for etching a specimen of lamination layer formed on a substrate using gas plasma in a processing chamber, comprising: an etching process chamber to which a gas is supplied to produce plasma, and the lamination layer having more than two layers including at least one layer of Ni-Fe alloy or Ni-Fe-Co alloy formed on the substrate is etched therein at a temperature of the specimen below 200°C ; a rinsing unit for rinsing in a liquid a portion of the lamination layer including the Ni-Fe alloy and is exposed to atmosphere by the etching process; and a dryer unit for drying the portion of the lamination layer including Ni-Fe alloy which is exposed, wherein the lamination layer of Ni-Fe alloy which is dried is further subjected to subsequent etching using gas plasma.

15

20

The present invention also provides for an apparatus for processing a specimen, comprising: an atmospheric loader; a vacuum transport chamber with a vacuum transport robot provided therein; an unload and a load lock chambers which connect between the atmospheric loader and the vacuum transport chamber; and an

25

etching process chamber of the etching process apparatus which is connected to the vacuum transport chamber, wherein the atmospheric loader is provided with a rinsing cup, hot plate and the like of the rinsing and drying unit described above connected thereto.

According to another aspect of the invention, a plurality of etching chambers are provided in the apparatus for processing the specimen.

According to still another aspect of the invention, a method of manufacture of a magnetic head having a structure of an upper magnetic pole and a lower magnetic pole disposed opposite thereto is provided, the method is comprised of the steps of: forming a lamination layer including an upper photo resist layer, a hard mask layer made of SiO_2 or alumina, a lower photo resist layer and a seed layer made of Ni-Fe alloy or Ni-Fe-Co alloy; etching the hard mask layer by plasma processing using the upper photo resist layer as a mask; further etching the lower photo resist layer by plasma processing using a gas which contains chlorine with the hard mask used as a mask such that a deep groove is formed until the seed layer is exposed in the bottom of the deep groove; removing a residual chlorine compound deposited on the surface of the seed layer which is exposed by rinsing with a liquid; drying the rinsed surface; and after that, embedding Ni-Fe alloy into the deep groove which makes contact with the seed layer.

According to still more aspect of the invention, a method of manufacture of a magnetic head having a structure of an upper magnetic pole and a lower magnetic pole disposed opposite thereto

is provided, the method is comprised of the steps of: forming a lamination layer including a seed layer made of Ni-Fe alloy or Ni-Fe-Co alloy, an upper magnetic pole made of Ni-Fe alloy in close contact with the seed layer, a gap layer of an oxide film in close
5 contact with the seed layer, and a shield layer made of Ni-Fe alloy in close contact with the gap layer; etching the seed layer using the upper magnetic pole as a mask with a gas which contains chlorine by plasma etching; and after that, removing a residual chlorine compound using a liquid.

10 Further, according to the invention, a method of manufacture of a magnetic head which has a structure of an upper magnetic pole and a lower magnetic pole disposed opposite thereto is provided, the method is comprised of the steps of: forming a lamination layer which includes a seed layer made of Ni-Fe alloy
15 or Ni-Fe-Co alloy and an upper magnetic pole made of Ni-Fe alloy connected with the seed layer, a gap layer made of an oxide film in close contact with the seed layer, and a shield layer made of Ni-Fe alloy in close contact with the gap layer; etching the seed layer; etching the gap layer by plasma etching using the upper
20 magnetic pole as a mask and with a gas which contains chlorine or fluorine; and then removing a residual chlorine compound by rinsing with a liquid.

According to still further aspect of the invention, a method of manufacture of a magnetic head having a structure of an upper
25 magnetic pole and a lower magnetic pole disposed opposite thereto is provided, the method is comprised of the steps of: forming a lamination layer which includes a seed layer made of Ni-Fe alloy

or Ni-Fe-Co alloy and an upper magnetic pole made of Ni-Fe alloy connected with the seed layer, a gap layer made of an oxide film in close contact with the seed layer, and a shield layer made of Ni-Fe alloy in close contact with the gap layer; etching the seed
5 layer; etching the gap layer; trim-etching the shield layer using the upper magnetic pole as a mask and with a gas containing chlorine by plasma processing; and then removing a residual chlorine compound by rinsing with a liquid.

According to still another aspect of the invention, a method
10 of manufacture of a magnetic head having a structure of an upper magnetic pole and a lower magnetic pole disposed opposite thereto is provided, the method is comprised of the steps of: forming a lamination layer which includes a seed layer made of Ni-Fe alloy or Ni-Fe-Co alloy and an upper magnetic pole made of Ni-Fe alloy
15 connected with the seed layer, a gap layer made of an oxide film in close contact with the seed layer, and a shield layer made of Ni-Fe alloy in close contact with the gap layer; etching the seed layer, the gap layer and the shield layer, respectively, using the upper magnetic pole as a mask by plasma etching exclusively
20 in a vertical direction; and executing a corrosion prevention treatment to remove a residual chlorine compound deposited on an etched surface.

In the method of manufacture of a magnetic head according to the invention, the gap layer is processed by plasma etching
25 with a gas which contains chlorine or fluorine, and the seed layer and the shield layer are processed by plasma etching with a gas which contains chlorine and argon gases, and further the corrosion

prevention treatment is executed by rinsing using a liquid.

The invention provides for a method of manufacture of a magnetic head having a structure of an upper magnetic pole and a lower magnetic pole disposed opposite thereto, the method is
5 comprised of the steps of: forming a lamination layer which includes a seed layer made of Ni-Fe alloy or Ni-Fe-Co alloy and an upper magnetic pole made of Ni-Fe alloy connected with the seed layer, a gap layer made of an oxide film in close contact with the seed layer, and a shield layer made of Ni-Fe alloy in close
10 contact with the gap layer; etching the seed layer and the gap layer continuously by plasma etching using the upper magnetic pole as a mask; and then executing a corrosion prevention treatment for removing a residual chlorine compound deposited on an etched surface.

15 The invention provides for a method of manufacture of a magnetic head having a structure of an upper magnetic pole and a lower magnetic pole disposed opposite thereto, and in particular, a method of manufacture of the upper magnetic pole thereof, the method thereof is comprised of the steps of: forming a lamination
20 layer which includes an upper magnetic layer made of Ni-Fe alloy, and a mask layer made of an oxide film such as photo resist or alumina, a silicon oxide and the like; etching the upper magnetic pole layer by plasma etching with the mask layer used as its mask; and then executing a corrosion prevention treatment for removing
25 a residual chlorine compound deposited on an etched surface.

Further, the invention provides for a method of processing an upper magnetic pole of a magnetic head having a structure of

an upper magnetic pole and a lower magnetic pole disposed opposite thereto, the method is comprised of the steps of: forming, from the above,

- (A) a photo resist film,
- 5 (B) an oxide layer such as alumina, silicon oxide or the like,
- (C) an upper magnetic pole layer made of Ni-Fe alloy,
- (D) a seed layer made of Ni-Fe-Co alloy for bonding Ni-Fe alloy,
- (E) a gap layer made of an oxide film such as alumina, silicon oxide or the like, and
- 10 (F) a shield layer made of Ni-Fe alloy;

executing the following plasma process steps continuously

- (1) etching the oxide film layer using the mask layer as its mask,
- 15 (2) etching the upper magnetic pole layer using the oxide film layer as its mask,
- (3) etching the seed layer using the oxide film layer or the upper magnetic pole layer as its mask,
- (4) etching the gap layer using the oxide film layer and the upper magnetic pole layer, and
- 20 (5) trim-etching the shield layer using the oxide film layer and the upper magnetic pole layer as its mask; and then

executing a corrosion prevention treatment for removing a residual chlorine compound deposited on an etched surface.

25

According to still another aspect of the invention of the method of manufacture of the magnetic head described above, any

portions of the plasma process steps (1)-(5) may be selected, combined and executed sequentially, and after that the corrosion prevention treatment for removing the residual chlorine compound may be executed.

5 According to furthermore aspect of the invention described above, steps of rinsing and drying for removal of residual chlorine components and deposits on the side wall may be executed after each step of the plasma process steps (1)-(5), which are continuously executed in a single apparatus.

10 According to still another aspect of the invention of the method of manufacture of the magnetic head described above, the method is characterized in that the etching process of step (1) is executed using a gas which contains mainly BCl_3 or fluorine, steps (2) and (3) are executed using a gas which contains mainly chlorine, step (4) is executed using a gas which contains mainly
15 BCl_3 or fluorine, and step (5) is executed using a gas which contains mainly chlorine, in order to increase a selectivity ratio between the mask and under-layers during each etching processing step.

20

BRIEF DESCRIPTION OF THE DRAWINGS

The other features and advantages of the invention will be apparent from the following description taken in connection with the accompanying drawings, in which:

25 Fig. 1 is a schematic diagram indicating one embodiment of the invention;

 Fig. 2 is a cross-section of units in vacuum of Fig. 1;

Fig. 3 is a schematic diagram in cross-section of an etching chamber;

Fig. 4 is a perspective view in part of the etching chamber of Fig. 3;

5 Fig. 5 is a diagram for explaining a part of the embodiment of the invention;

Fig. 6 is a schematic diagram in perspective of a magnetic head according to the invention;

10 Fig. 7 illustrates forming of an upper magnetic pole by a three-layer resist etching according to the invention;

Fig. 8 illustrates vertical forming of a seed layer of Ni-Fe, a gap layer of Al₂O₃, and a shield under-layer of NiFe of the invention;

15 Fig. 9 illustrates another embodiment of the invention and its steps of manufacture;

Fig. 10 explains an advantage and effect of rinsing of the invention;

Fig. 11 shows a result of experiments according to the invention; and

20

PREFERRED EMBODIMENT

An embodiment of the invention will be described more in detail with reference to the accompanying drawings in the following.

25 Figure 1 shows a schematic arrangement of one embodiment of the invention, and Fig. 2 shows a cross-section of portions in vacuum of Fig. 1. In these figures, an apparatus for processing

specimens according to the invention is provided with an etching process unit 1, a vacuum transport unit 2, a load lock chamber 3, an unload lock chamber 4, an atmospheric transport unit 5, a rinsing/drying unit 6, an atmospheric loader 7, and a cassette table 8.

As etching process unit 1, an etching device for etching the specimen using plasma in vacuum is used. By way of example, for its plasma etching process, an induction coupling type plasma etching apparatus, helicon type plasma etching apparatus, two-frequency excitation parallel plane type plasma etching apparatus, microwave plasma etching apparatus or the like are adopted.

Figure 3 is a schematic diagram indicating etching process unit 1 of the invention, and Fig. 4 is a perspective view of the etching process unit 1.

With reference to Fig. 3, etching process unit 1 is provided with: an etching process chamber 11 which is constructed by alumina ceramic or quartz bell jar 10; specimen stage 12; process gas inlet portion 13; vacuum exhaust portion 14; and induction coil 15 (for example, of 13 MHz, 2kW), wherein on specimen stage 12, an article 18 such as a magnetic pole material to be processed is mounted, which will be described later. Further, a high frequency unit 16 capable of outputting, for example, 800kHz, 200W is connected to the specimen stage 12.

With reference to Fig. 1, rinsing/drying unit 6 is provided with rinsing cup 21, hot plate 22 and transfer device 23. For water rinsing, a spinning type wet process device is used.

In the spinning wet process device for use of rinsing, the specimen after post treatment undergoes, for example, water spinning rinsing or chemical solution spinning rinsing followed by water spinning rinsing. In this case, its chemical solution
5 is selected appropriately depending on a type of material to be removed from the specimen after post-treatment. Further, as its process atmosphere, inactive gas atmosphere such as nitrogen gas or the like, or even air may be used. Also, after this wet processing, a drying process by water spinning or the like may
10 be adopted.

As its drying process device, a dryer for drying the specimen after having been subjected to wet processing in the wet process device by heating the same, or a blower for drying the specimen by blowing a dry gas or the like is used. Further, as
15 its process atmosphere, nitrogen gas or air may be used.

Vacuum transport unit 2 has a function to transport a processed specimen between a process station (not indicated) of etching process unit 1 and load lock chamber 3 or unload lock chamber 4. Atmospheric transport unit 5 has a function to
20 transport the processed specimen between load lock chamber 3 or unload lock chamber 4 and rinsing/drying unit 6. Transport device 23 has a function to transfer a wet-processed specimen between a process station (not indicated) of the wet process unit and a process station (not indicated) of the drying process unit. As
25 its specimen transport device, any prior art transport devices may be adopted, including, for example, those having a gripper to grip a specimen at its periphery, a scoop to hold the specimen

thereon, a magnetic chuck, a vacuum chuck or the like each attached to an arm which is mechanically, electrically or magnetically actuated, a belt transport device wound around a main drive roller and a follower roller, or air blower transport device may be used.

5 Vacuum transport unit 2 is arranged such that, when the etching process unit 1 is a device which processes the specimen using plasma in vacuum, the processed specimen is ensured to be transported without being exposed to atmosphere, with the same being contained in vacuum.

10 Atmospheric transport unit 6 has also a function to transport the specimen which is transported from unload lock chamber 4 to dryer unit 6 and dried up therein such that the specimen is collected by cassette 8 which is mounted on cassette table 9.

15 In case the etching process unit 1 is a device which processes a specimen using plasma in vacuum, a specimen's processing atmosphere in etching process unit 1 and a space through which a specimen to be processed is transported or a space through which a specimen having been processed is transported are
 20 arranged to be communicative with each other and/or interruptible. Further, the space through which the specimen is transported, specimen's wet process atmosphere in the wet processing unit, a space through which a wet-processed specimen is transported, specimen's drying process atmosphere in the dryer unit, and a
 25 space through which a drying processed specimen is transported may be arranged to be communicative with each other or interruptible.

A process station is provided in etching process unit 1. In the case where etching process unit 1 is a device, which processes the specimen using plasma in vacuum, its process station is a specimen stage 12. One or a plurality of specimens may be
5 mounted on this specimen stage 12.

If etching is to applied to a plurality of lamination films sequentially, and a liquid rinsing is required for removing residual deposits on the etched side wall after each etching step, the specimen delivered from the hot plate is transported again
10 to the load lock chamber without being collected by the cassette.

With reference to Fig. 5, specimen transport devices such as vacuum transport device 2, atmospheric transport device 5 are provided between etching process unit 1, rinsing/drying unit 6 and atmospheric loader 7. Vacuum transport unit 5 has a vacuum
15 transport chamber in which a vacuum transport robot (not indicated) is provided.

In the case where the seed layer, the gap layer and the shield layer are to be processed continuously, and at the same time each corrosion prevention/deposit removal processing is to be applied
20 after each step of the above, the specimen is returned from the atmospheric loader 7 to the vacuum transport unit 2 in repetition as indicated in Fig. 5.

Now, an example of a specimen where a magnetic pole of a magnetic head is to be formed will be described in the following.

25 With reference to Fig. 6, an example of a typical magnetic head is shown. Magnetic head 31 is comprised of a write head 32 and a read head 33, and this write head 32 has an upper magnetic

pole 34, a coil 35 and an upper shield 36 while the read head 33 has a GMR read head 37, a lower magnetic pole 38 and a lower shield 39, wherein the upper magnetic pole 34 and the lower magnetic pole 38 are manufactured in a manner to be described in the following.

5 By way of example, an arrow mark in Fig. 7 indicates a direction of disk slide.

The invention is preferably applied to manufacture of a device having a lamination structure with an alloy layer of Fe-Ni or Ni-Fe-Co. The invention will be described in the following by way of example of manufacture of a lamination structure having at least one layer of FeNi alloy and a photo resist layer as its mask, if necessary, which is etched by gas plasma which contains a process gas such as chlorine in etching process chamber 11.

10 With reference to Fig. 7, steps of forming an upper magnetic pole by the three layer resist etching are described with respect to each mode of structures from D1 to D6 and each step thereof from S1 to S5. A specimen used here is comprised of upper photo resist (PR) layer 41 of 0.5-1.0 μm thick, hard mask layer 42 of 1000-4000 A thick made of SiO_2 or alumina (SiO_2 is shown in Fig. 7), lower photo resist layer 43 of 2-6 μm thick, and seed layer 44 of 1000-3000 A thick made of NiFe alloy (shown as under-layer NiFe layer in Fig. 7).

In step S1, PR layer 41 is exposed to form a mask pattern.

Then, in step S2, SiO_2 film 42 undergoes etching process.

25 A width of etching in this case is, for example, 0.4 μm .

The PR layer which is, for example, 4 μm thick is subjected to vertical etching in step S3. Thereby, a resist deep groove etch

plating frame is formed. Namely, the lower photo resist layer is plasma-etched using a gas which contains chlorine and with the hard mask layer used as its mask so as to form deep groove 45 until a part of seed layer 44 is exposed in the bottom of the deep groove.

5 In order to remove residual chlorine components deposited in the bottom of the deep groove and on an exposed surface of NiFe alloy as indicated in D4, liquid rinsing and drying processes are applied in step S4.

Detection of a stop point in etching process in step S2 is
10 carried out by sensing plasma emission in etching process chamber 1, transmitting its signal via glass fiber 20 which is attached thereto to a spectrometer 19, and extracting a spectroscopic emission line, for example, of SiF. Namely, when etching approaches its terminal point, a level of emission of SiF drops,
15 which drop can be detected and used for determination of the stop point thereof. Likewise, a stop point in step S3 can be determined, for example, by an emission line of CN when CO gas or N₂ gas is added to its etching gas.

After that, Ni-Fe alloy is embedded in the deep groove by
20 plating, CVD or sputtering methods, which is connected to seed layer 44 to form an upper magnetic pole (NiFe layer 46 shown in Fig. 7 is formed by plating).

In Fig. 8, a method of vertical etching of seed layer 44, gap layer 47 and shield layer 48 is indicated with respect to modes
25 of structures from D6 to D10 and steps from S6 to S11 corresponding thereto. For an example of Fig. 8, a NiFe layer is used as its seed layer, Al₂O₃ layer is used as its gap layer and a NiFe

under-layer is used as its shield layer.

In Fig. 8, lamination layer 51 is formed by shield layer 48 made of NiFe alloy, upper magnetic pole 50 made of NiFe alloy connected with shield layer 48, gap layer 47 made of oxide film in close contact with seed layer 44, and shield layer 48 made of NiFe alloy connected to gap layer 47.

Seed layer 44 becomes an upper magnetic pole adhesion layer, and gap layer 47 is formed by an oxide film such as alumina, SiO₂/TaO or the like.

Cr-containing NiFe alloy adhesion layer prior to forming a magnetic head layer is subjected to plasma etching using a gas comprising chlorine gas and a rare gas such as argon in step S6. In this step, a vertical etching of seed layer 44 using upper magnetic pole 50 as its mask is carried out. Subsequently, a corrosion prevention treatment is applied by liquid rinsing in order to remove residual etching products and residual chlorine components in step S7.

If gap layer 47 is alumina, it is subjected to plasma etching with a BCl₃/Cl₂ gas in step S8. In this case, it means that vertical etching of gap layer 47 is carried out using upper magnetic pole 50 as its mask. If gap layer 47 is SiO₂, its plasma etching is done using fluorine gas. After that, corrosion prevention treatment is applied by liquid rinsing in order to remove residual etching products and chlorine components deposited on sidewalls in step S9.

Then, in step S10, trim-etching is applied to shield layer 48 by plasma etching using chlorine gas. It means that in this

step a vertical etching of the shield layer is carried out using upper magnetic pole 50 as its mask. By this trimming, an intermediate magnetic pole 49 which has the same cross-section as that of upper magnetic pole 50 can be formed.

5 Subsequently, in step S11, a corrosion prevention treatment is applied by liquid rinsing in order to remove residual etching products and chlorine components.

10 Immediately after the etching process using gas plasma (of the first step), that is, within 5 minutes, the liquid rinsing (of the second step) is carried out sequentially to prevent corrosion.

This gas plasma can be generated using at least one of BCl_3 , Ar and O_2 , or in combination therebetween, besides chlorine gas, as described above.

15 The gas plasma etching process of the invention is carried out at a temperature below 150°C to room temperatures, or lower than that.

The second step of the invention includes one or more than two of the following steps:

- 20 (A) pure water rinsing,
 (B) alkaline solution cleaning followed by water rinsing,
 (C) acid solution cleaning followed by water rinsing,
 (D) fluorine nitric acid cleaning followed by water rinsing, and
 (E) neutral detergent cleaning followed by water rinsing.

25

Heat drying in rinsing/drying unit 6 is conducted using hot plate 22 the temperature of which is kept below 200°C .

At least one of the following layers is included in the lamination layer other than the NiFe alloy layer, which is to be etched by gas plasma in the process chamber:

- (A) a photo resist layer
- 5 (B) alumina (Al_2O_3) layer,
- (C) silicon oxide layer,
- (D) Cu layer, and
- (E) Ta layer.

10 The substrate of the invention described above is $\text{Al}_2\text{O}_3/\text{TiC}$ substrate, on which the layer of NiFe alloy is formed, which is subjected to the gas plasma etching in the process chamber.

As to the lamination layer of the upper magnetic pole 50
15 comprising the PR layer/ Al_2O_3 or SiO_2 layer/seed layer made of NiFe alloy, which are formed $1\text{ }\mu\text{m}/0.5\text{--}1.0\text{ }\mu\text{m}/2\text{--}4\text{ }\mu\text{m}$ thick, respectively, of which the Al_2O_3 layer can be etched by gas plasma using chlorine gas, SiO_2 can be etched using fluorine gas, and the seed layer made of NiFe alloy can be etched using a gas
20 containing chlorine/argon gas. Here, the high density is defined to be 1 to 10 mA/cm^2 (ion saturation current density), and the low density to be 0.1 to 1 mA/cm^2 .

By applying corrosion prevention treatment for each lamination layer of Fig. 8, at the same time, removing etching
25 products deposited on the side walls during the etching process, and consecutively carrying out etching process within the same process chamber, an excellent vertical etching of the invention

becomes possible.

Alternatively, if a thickness of the deposits on the side wall is not too thick, it may be arranged such that respective steps in Fig. 8 of S6 for etching the seed layer, S7 for etching the gap layer, and S10 for trim-etching the shield layer are executed continuously within a single or a plurality of etching units 1 without being taken out of vacuum, and after that, a corrosion prevention treatment of S11 is applied.

For etching of NiFe layer, a gas mainly containing chlorine is used. In this case, a large etching ratio (selectivity ratio) respective to the under-layer alumina film can be obtained. This is because that with the gas mainly containing chlorine, the alumina film is hardly etched. To the contrary, when etching the alumina film, a gas mainly containing BCl_3 is used. This is because that a reaction of alumina $\text{Al}_2\text{O}_3 + 2\text{BCl}_3 \rightarrow \text{AlCl}_3 + \text{B}_2\text{O}_3$ proceeds, and of which $\text{AlCl}_3 + \text{B}_2\text{O}_3$ are evaporative in vacuum, the etching process is expedited. In this case, with BCl_3 gas, its etching rate of NiFe film is low, therefore, a high selectivity ratio relative to the mask NiFe or underlayer NiFe films can be obtained. In the argon ion milling method, however, this stoichiometric etching mechanism does not work, thereby rendering a lower selectivity ratio in both cases of etching NiFe and alumina.

Detection of respective stop points of etching in respective steps of Fig. 8 is executed in the following manner. When etching NiFe layer of step S6, an emission line of Fe is monitored. When etching alumina layer of step S8, an emission line of Al is monitored. When trim-etching NiFe layer in step S10, its

etching time is calculated and controlled on the basis of its etching rate measured in advance.

Now, with reference to Fig. 9, an example of forming an upper magnetic pole by 5 layer continuous etching of the invention will be described according to its structure modes D12 to D16 and respective steps S12 to S20 corresponding thereto. Its specimen is a lamination layer which is comprised of: upper photo resist (PR) layer 41 of 0.5-1.0 μm thick; hard mask layer 42 of SiO₂ or alumina of 2000-6000 A thick (alumina layer is shown); upper magnetic pole layer 50 of NiFe alloy of 2-6 μm thick (which includes the seed layer if the upper magnetic pole is formed by plating); gap layer 47 of SiO₂ or alumina of 1000-2000 A thick; and shield layer 48 of NiFe alloy. In step S12, PR layer 41 is exposed to form a mask pattern. Then, in step S13, etching of hard mask layer 52 is carried out. After etching of the hard mask, a water rinsing process is carried out for removal of residual compounds deposited on the sidewall and for corrosion prevention in step S14.

Then, the upper magnetic pole layer is etched by plasma processing with a gas which contains chlorine and with the hard mask used as its mask in step S15. With chlorine gas, because its etching rate is approximately 1000 A/min., and its selectivity ratio relative to the alumina hard mask layer is approximately 8, a thinner hard mask layer as thin as a few thousands A thick will be sufficient. At the same time, because its selectivity ratio relative to the under-layer alumina gap layer is also high approximately as 8, it becomes easy, by carrying out over-etching

fully, to eliminate incomplete removal of etching debris resulting from uneven etching rates throughout the surfaces of the specimen.

When gap layer 47 is alumina, it is applied plasma etching using BCl₃ gas in step S17. At this instant, a part of the hard mask layer remaining on the upper magnetic pole is also removed by etching. Then, in order to remove residual deposits on the sidewall and residual chlorine components, liquid rinsing is applied in step S18. Subsequently, shield layer 48 is trimming-etched by plasma etching with chlorine gas in step S19. After that, liquid rinsing is applied in order to remove residual etching products and chlorine components in step S20.

In this invention, because NiFe alloy is included in the lamination layer, and because the high density plasma and the low energy irradiation ion method is adopted, a mode of residual chlorine compound remaining after etching is considered mainly to be in a state of physical/chemical adsorption of chlorine on the surface of alloy.

As indicated in Fig. 10, chlorine molecules exist as physically/chemically adsorbed on NiFe alloy immediately after etching. When disposed in atmosphere, chemical reaction proceeds such that water molecule in the air reacts with chlorine molecule to form HCl, which HCl reacts with Fe to corrode the surface of the alloy. In contrast, according to the invention, such chlorine molecules existing in the state of adsorption can be removed by dissolution into pure water and separation from the surface. Thereby, by removal of the residual chlorine components remaining

after the gas plasma etching, which can be simply enabled by the rinsing (anti-corrosion) process of the invention, the corrosion prevention process of the invention can be achieved without any additional specific post treatment for the residual etching products.

Fig. 11 compares results of experiments obtained by the prior art and the present invention. A prior art gap layer was corroded in five minutes when disposed in air after its etching. In contrast, the gap layer which was subjected to the pure water rinsing and drying process within 2 minutes after its etching according to the invention was not corroded even after elapse of 2 weeks of disposal in air. Further, thanks to its high-density plasma etching, even at a temperature of 40°C of the specimen's stage, a high etching rate of 1000 Å/min. is achieved. Other related conditions of the experiments are also indicated in Fig. 11.

Figure 12 illustrates dimension control capabilities of the upper magnetic pole formed by the plasma etching method and the ion milling method, respectively. When the ion milling or low-density plasma is used, its selectivity ratio relative to the mask is low. For example, when etching Al₂O₃, its selectivity ratio relative to its mask material (NiFe) is 0.2-1.0. In contrast, when the high-density plasma is used, a high selectivity ratio of 1.0-10.0 is achieved. This is because that ion energy of incidence of the specimen is as high as 500V-3 kV, thereby etching the material to be etched and the mask material non-selectively and physically all the same.

In the case where the high density plasma is used, the second high frequency power source as indicated in Fig. 3 which can supply power directly to the specimen's stage independently of the primary high frequency power source for generating the high density plasma is provided separately according to the invention, and the output from this second power supply is controlled such that the ion energy of incidence on the specimen is appropriately controlled. Preferably, its ion energy of incidence is set at a low value approximately from 50 to 500 V, and at the same time, a gas to be used is selected appropriately such as, for example, BCl₃ gas when etching alumina, and chlorine gas when etching NiFe alloy, in order to achieve a higher selectivity ratio for respective materials to be etched.

As described hereinabove, in the milling method, because of its lower selectivity ratio, an initial length of its upper magnetic pole at the start of etching must have a longer size. Namely, a large quantity of margin of etching for the upper magnetic pole must be provided. Therefore, it becomes difficult to have a precise dimensional control when forming the upper magnetic pole. Further, because of difficulty in obtaining verticality when etching the gap layer (sputtered substances tend to attach to the sidewall, resulting in a tapered shape), the specimen must be tilted in various directions when milling in order to obtain the verticality.

In contrast, according to the one embodiment of the invention, by provision of the steps of etching the lamination layer including the seed layer, gap layer and shield layer by the

high density plasma process exclusively in the vertical direction with the upper magnetic pole used as the mask, and of applying the corrosion prevention treatment for removing the residual chlorine components deposited on the etched surface, it becomes possible for the gap layer to be formed to have a vertical shape as indicated in Fig. 12. Further, it also becomes possible for the intermediate magnetic pole to be formed to have the same vertical shape as that of the upper magnetic pole.

According to the invention described above, featuring in that its specimen which is formed from the lamination layer which includes NiFe alloy layer is etched using the high density gas plasma, and then, immediately after the etching process, the liquid rinsing is applied, thereby eliminating the influence of the residual etching products due to ionization and providing the corrosion prevention treatment simultaneously. Therefore, in the case where the specimen to be processed is an upper magnetic pole, a vertical etching of the upper magnetic pole becomes significantly easy, and in addition, its verticality is ensured to be maintained in air. Therefore, it provides further advantage such that a track width which is one of the parameters that determine fundamental properties of the magnetic head can be ensured to be adequately prescribed.

WHAT IS CLAIMED IS:

1. A method of processing a specimen comprising:
 - a first step of etching the specimen which is a lamination
5 layer which is formed on a substrate and includes at least one layer made of NiFe alloy or NiFeCo alloy, by gas plasma with a gas which contains chlorine at a temperature of the specimen below 200°C in an etching chamber;
 - a second step of removing a residual chlorine component
10 deposited on an exposed portion of said lamination layer during said first step, and eliminating debris deposited on a side wall thereof by rinsing the same using at least one liquid; and
 - a third step of drying the specimen after rinsing thereof.
- 15 2. A method of processing a specimen according to claim 1, wherein said second step is executed continuously after said first step.
3. A method of processing a specimen according to claim 1,
20 wherein said gas plasma is generated using at least one of Cl_2 , BCl_2 , Ar and O_2 gases, or in combination thereof.
4. A method of processing a specimen according to claim 1,
wherein said second step of liquid rinsing includes one or more
25 than two of the following steps:
 - (A) pure water rinsing,
 - (B) alkaline liquid cleaning followed by water rinsing,

- (C) acidic liquid cleaning followed by water rinsing,
- (D) fluorine nitric acid cleaning followed by water rinsing,
- (E) neutral detergent cleaning followed by water rinsing.

5 5. A method of processing a specimen according to claims 1 or
2, wherein said third step of drying is executed at a temperature
below 200°C.

10 6. A method of processing a specimen according to claim 1,
wherein a temperature of said liquid is controlled.

15 7. A method of processing a specimen according to claim 1,
wherein said lamination layer includes, in addition to said NiFe
or NiFeCo alloys, at least one or more of the following layers
which are to be etched by gas plasma in said process chamber:

- (A) photo resist layer,
- (B) alumina (Al_2O_3) layer,
- (C) silicon oxide layer,
- (D) Cu layer,
- 20 (E) Ta layer, and
- (F) Cr layer.

25 8. A method of processing a specimen according to claim 1,
wherein said substrate is a sintered substrate comprising Al_2O_3
and TiC, and on said substrate a layer of NiFe or NiFeCo alloy
is formed, which is to be etched in said process chamber.

9. An apparatus for processing a specimen which is laminated on a substrate, comprising:

an etching process unit which is supplied with a gas to produce plasma, for etching said specimen laminated on said
5 substrate having two or more layers at least one of which comprises NiFe or NiFeCo alloy, at a temperature of said specimen below 200°C;

a rinsing unit for rinsing an exposed surface of said lamination layer comprising said NiFe alloy which is exposed by
10 said etching, using a liquid; and

a dryer unit for drying said exposed surface of said lamination layer comprising said NiFe alloy after rinsing thereof, wherein said lamination layer comprising said NiFe alloy which is dried is further subjected to gas plasma etching.

15

10. An apparatus for processing a specimen according to claim 9, further comprising:

an atmospheric loader;

a vacuum transport chamber having a vacuum transport robot
20 therein; and

an unload and a load lock chambers connecting between said atmospheric loader and said vacuum transport chamber for delivering the specimen, wherein

said vacuum transport chamber is connected to said etching
25 process chamber of said apparatus, and

said atmospheric loader is connected to a rinsing cup, hot plate and the like provided in said rinsing/dryer unit.

11. An apparatus for processing a specimen according to claim 9, wherein said etching process chamber is provided in a plural number.

5

12. A method of manufacture of a magnetic head having an upper magnetic pole and a lower magnetic pole disposed opposite thereto and including a multiple layer resist etching thereof, comprising the steps of:

10 forming a lamination layer comprising an upper photo resist layer, a hard mask layer made of SiO_2 or alumina, a lower photo resist layer, and a seed layer made of NiFe or NiFeCo alloy;

plasma-etching said hard mask layer using said upper photo resist layer as its mask;

15 plasma-etching said lower photo resist layer to form a deep groove therein using a gas which contains chlorine with said hard mask used as its mask until said seed layer is exposed in the bottom of said deep groove;

20 removing a residual chlorine component deposited on an exposed surface of said seed layer by rinsing with a liquid;

drying after removal of said residual chlorine component;
and

embedding NiFe alloy into said deep groove to connect with said seed layer thereby forming said upper magnetic pole.

25

13. A method of manufacture of a magnetic head having an upper magnetic pole and a lower magnetic pole disposed opposite thereto

and including a seed layer processing thereof, comprising the steps of:

forming a lamination layer comprising a seed layer made of NiFe or NiFeCo alloy, upper magnetic pole made of NiFe alloy
5 connected to said seed layer, a gap layer made of an oxide such as alumina, silicon oxide or the like in close contact with said seed layer, and a shield layer made of NiFe alloy in close contact with said gap layer;

plasma-etching said seed layer using a gas which contains
10 chlorine with said upper magnetic pole used as its mask; and removing a residual chlorine component by liquid rinsing.

14. A method of manufacture of a magnetic head having an upper magnetic pole and a lower magnetic pole disposed opposite thereto
15 and including a gap layer processing thereof, comprising the steps of:

forming a lamination layer comprising a seed layer made of NiFe or NiFeCo alloy, upper magnetic pole made of NiFe alloy connected to said seed layer, a gap layer made of an oxide film
20 in close contact with said seed layer, and a shield layer made of NiFe alloy in close contact with said gap layer;

etching said seed layer;

etching said gap layer by plasma processing using a gas which contains chlorine or fluorine with said upper magnetic pole
25 used as its mask; and

removing a residual chlorine and/or fluorine components by liquid rinsing.

15. A method of manufacture of a magnetic head having an upper magnetic pole and a lower magnetic pole disposed opposite thereto and including a trim-processing thereof, comprising the steps of:

forming a lamination layer comprising a seed layer made of
 5 NiFe or NiFeCo alloy, an upper magnetic pole made of NiFe alloy connected to said seed layer, a gap layer made of an oxide film in close contact with said seed layer, and a shield layer made of NiFe alloy in close contact with said gap layer;

etching said seed layer;

10 etching said gap layer;

trim-etching said shield layer using a gas which contains chlorine by plasma processing with said upper magnetic pole used as its mask; and

removing a residual chlorine component by liquid rinsing.

15

16. A method of manufacture of a magnetic head having an upper magnetic pole and a lower magnetic pole disposed opposite thereto, comprising the steps of:

forming a lamination layer comprising a seed layer made of
 20 NiFe or NiFeCo alloy, an upper magnetic pole made of NiFe alloy connected to said seed layer, a gap layer made of an oxide film in close contact with said seed layer, and a shield layer made of NiFe alloy in close contact with said gap layer;

plasma-etching said seed layer, said gap layer and said
 25 shield layer consecutively with said upper magnetic pole used as a mask; and

applying a corrosion prevention treatment for removal of

a residual chlorine component deposited on an etched surface thereof.

17. A method of manufacture of a magnetic head according to
5 claim 18, wherein said gap layer is etched by gas plasma containing fluorine, said seed layer and said shield layer are etched by gas plasma containing chlorine and argon, and wherein said corrosion prevention treatment is carried out by liquid rinsing.

10 18. A method of manufacture of a magnetic head having an upper magnetic pole and a lower magnetic pole disposed opposite to each other, comprising the steps of:

forming a lamination layer comprising a seed layer made of NiFe or NiFeCo alloy, an upper magnetic pole made of NiFe alloy
15 connected to said seed layer, a gap layer made of an oxide film in close contact with said seed layer, and a shield layer made of NiFe alloy in close contact with said gap layer;

plasma-etching said seed layer and said gap layer
consecutively with said upper magnetic pole used as a mask; and
20 subsequently,

applying a corrosion prevention treatment for removal of a residual chlorine component deposited on an etched surface thereof.

25 19. A method of manufacture of a magnetic head having an upper magnetic pole and a lower magnetic pole disposed opposite to each other for manufacturing said upper magnetic pole thereof,

comprising the steps of:

forming a lamination layer comprising an upper magnetic pole layer made of NiFe alloy, and a mask layer of a photo resist or an oxide film made of alumina or silicon oxide film which is
5 laminated on said upper magnetic pole;

plasma etching said upper magnetic pole using said mask layer as its mask; and then

applying a corrosion prevention treatment for removal of a residual chlorine component deposited on an etched surface
10 thereof.

20. A method of manufacture of a magnetic head having an upper magnetic pole and a lower magnetic pole disposed opposite to each other and including a process for manufacture of said upper
15 magnetic pole thereof, comprising the steps of:

forming a lamination layer comprising, sequentially from above,

- (A) a photo resist film,
 - (B) an oxide film layer made of alumina, silicon oxide or
20 the like,
 - (C) an upper magnetic pole layer made of NiFe alloy,
 - (D) a seed layer made of NiFeCo alloy for bonding said NiFe alloy,
 - (E) a gap layer made of an oxide film such as alumina, silicon
25 oxide or the like, and
 - (F) a shield layer made of NiFe alloy;
- carrying out the following plasma etching steps

continuously,

(Step 1) etching said oxide film layer using said mask layer as its mask,

(Step 2) etching said upper magnetic pole layer using said
5 oxide film layer as its mask,

(Step 3) etching said seed layer using said upper oxide film layer or said upper magnetic pole layer as its mask,

(Step 4) etching said gas layer using said upper oxide film layer and said upper magnetic pole layer as its mask, and

10 (Step 5) trim-etching said shield layer using said upper oxide film layer and said upper magnetic pole layer; and after that,

applying a corrosion prevention treatment for removing a residual chlorine component deposited on an etched surface
15 thereof.

21. A method of manufacture of a magnetic head according to claim 19, comprising carrying out any steps of said plasma etching steps 1-5 continuously, then applying said corrosion prevention
20 treatment for removal of the residual chlorine component deposited on the etched surface thereof.

22. A method of manufacture of a magnetic head according to claim 20, comprising carrying out a rinsing/drying process for
25 each step of said plasma etching steps 1-5 for removing a residual chlorine component and a debris on a side wall, said rinsing/drying process being executed continuously within a

single unit.

23. A method of manufacture of a magnetic head according to claim 20, wherein, in order for a selectivity ratio between each mask and its under-layer to become large during each plasma etching step, said etching process (1) is executed using a gas which contains mainly BCl_3 or fluorine, said etching processes (2) and (3) are executed using a gas which contains mainly chlorine, said etching process (4) is executed using a gas which contains mainly BCl_3 or fluorine, and said etching process (5) is executed using a gas which contains mainly chlorine, respectively.

ABSTRACT OF THE DISCLOSURE

A method of processing a specimen, an apparatus therefor and a method of manufacture of a magnetic head using the same are provided, featuring a high etching rate at a low specimen's temperature, and a simple corrosion prevention treatment for removing a residual chlorine component by liquid rinsing, and thereby eliminating provision of such a post treatment step as to remove a corrosion product. The method of the invention comprises the steps of: forming a lamination layer comprising a seed layer of NiFe alloy, an upper magnetic pole of NiFe alloy connected to the seed layer, a gap layer of an oxide film in close contact with the seed layer, and a shield layer of NiFe alloy in close contact with the gap layer; plasma-etching the seed layer using a gas which contains chlorine with the upper magnetic pole used as its mask; and removing a residual chlorine component by liquid rinsing, followed by a drying process.

FIG.1

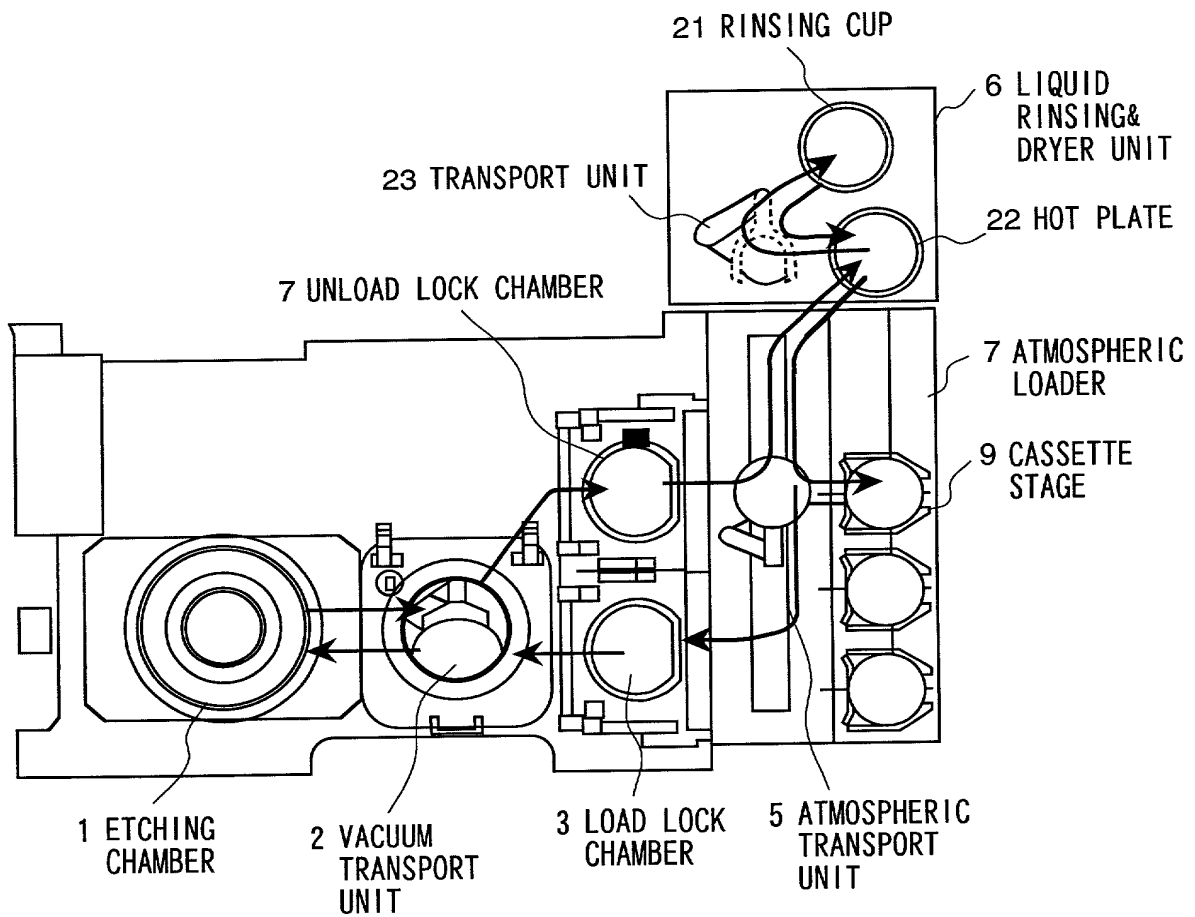


FIG.2

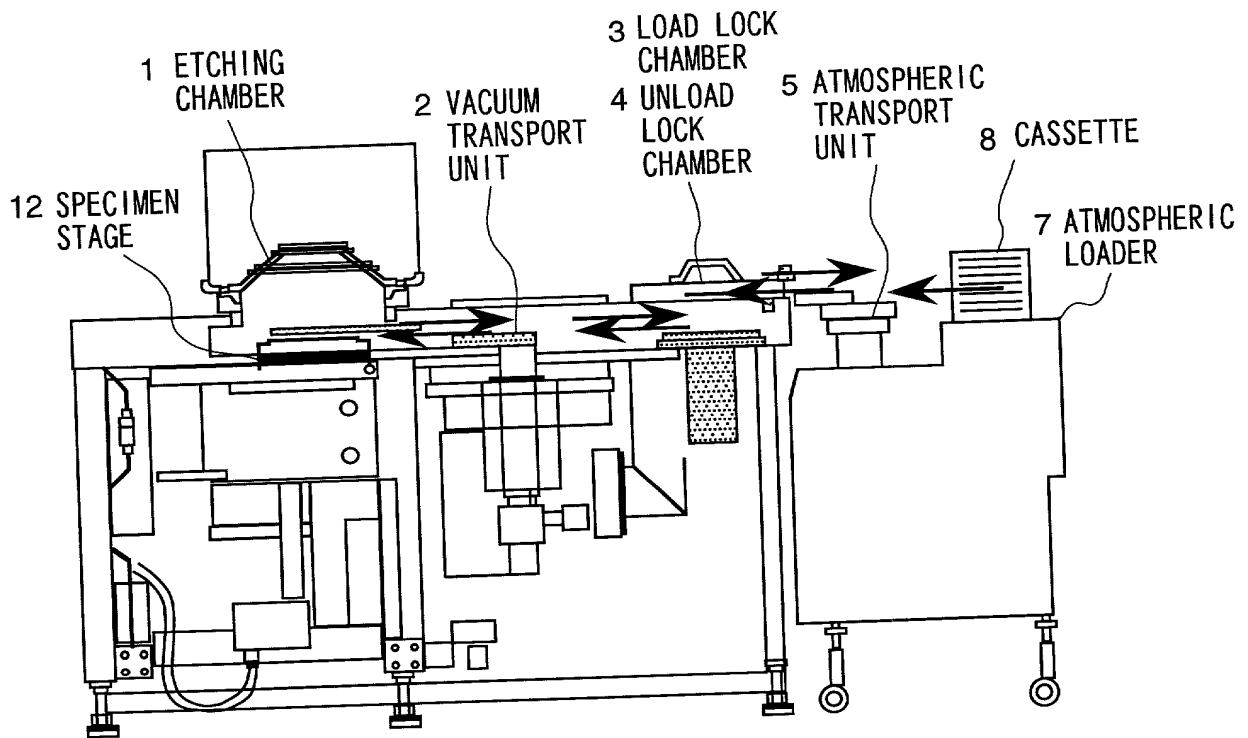


FIG.3

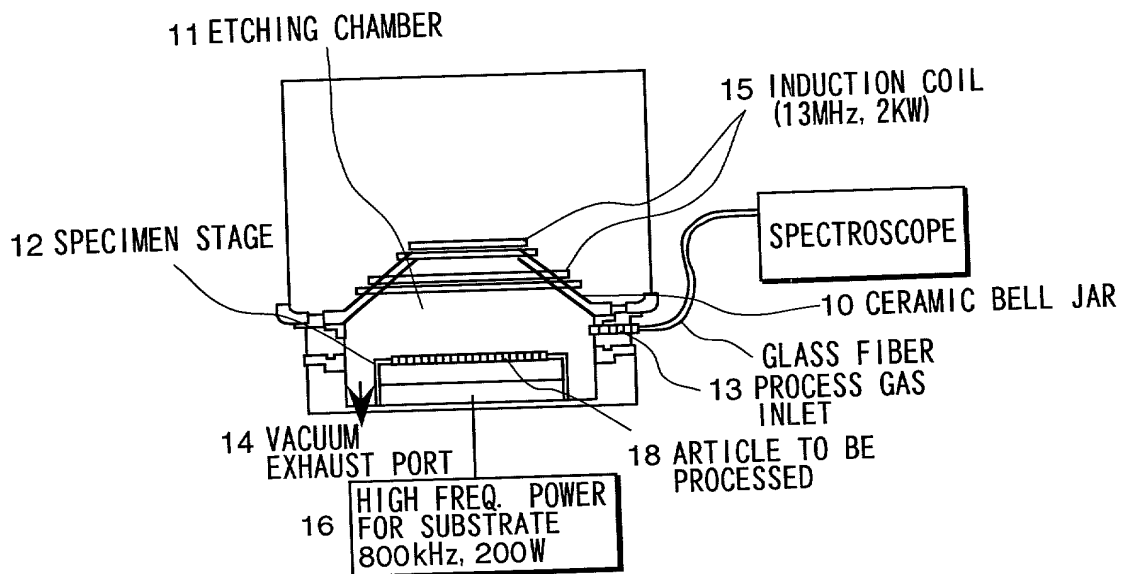


FIG.4

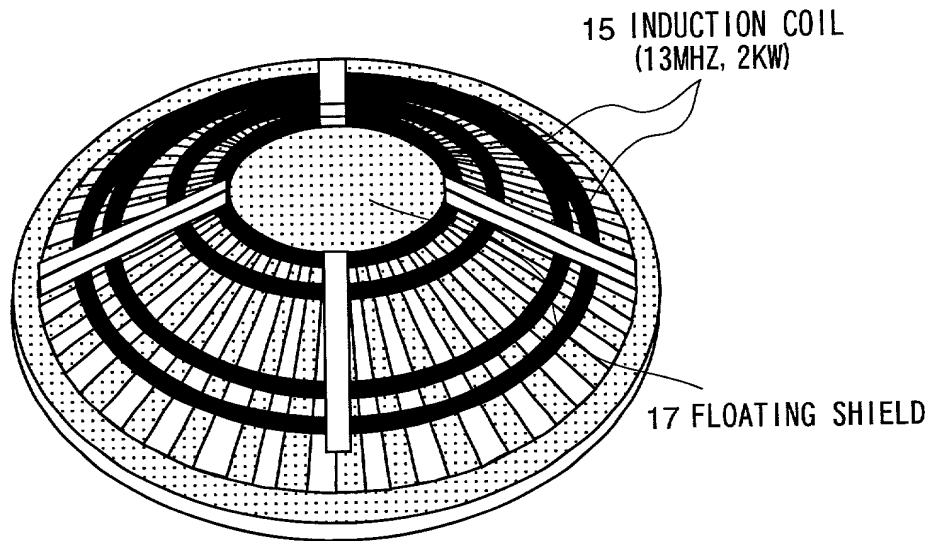


FIG.5

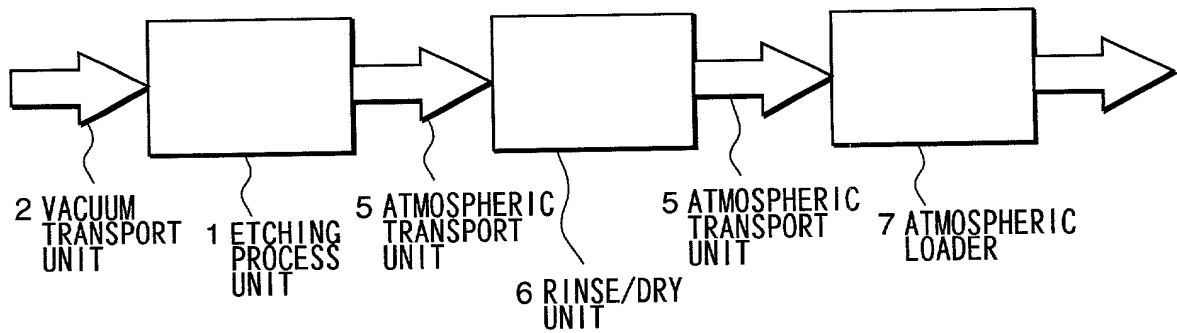


FIG.6

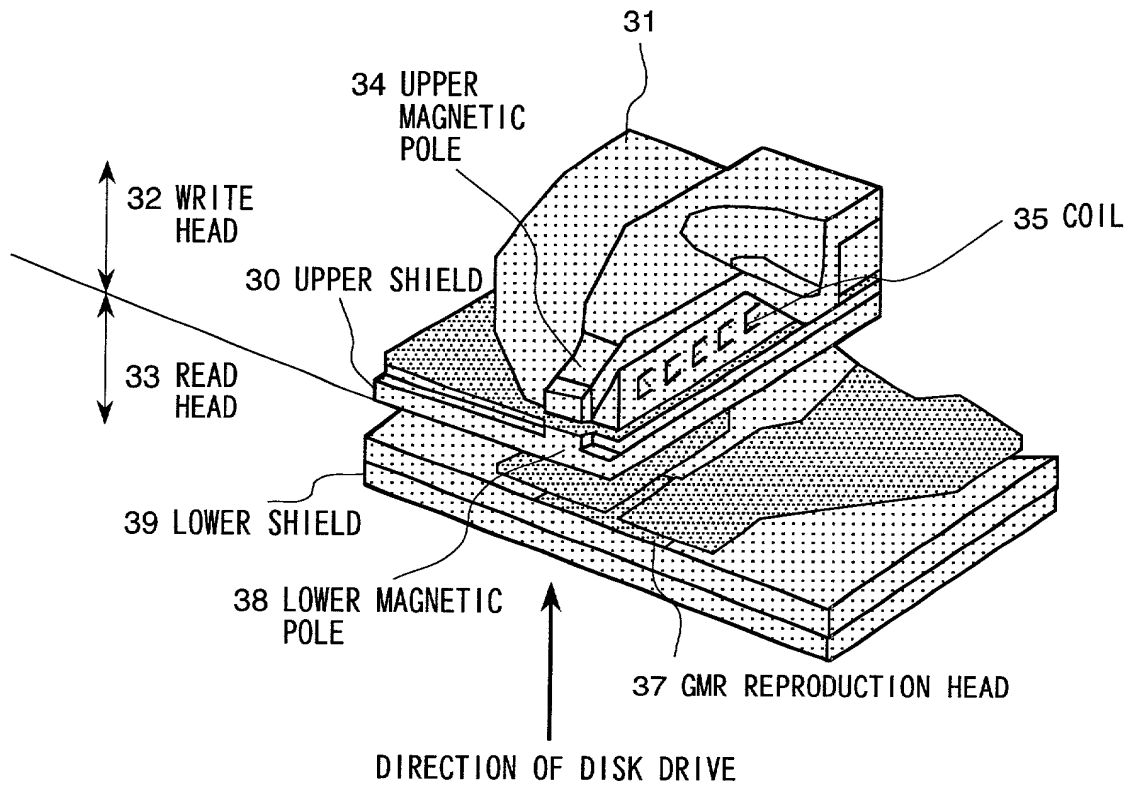


FIG.7

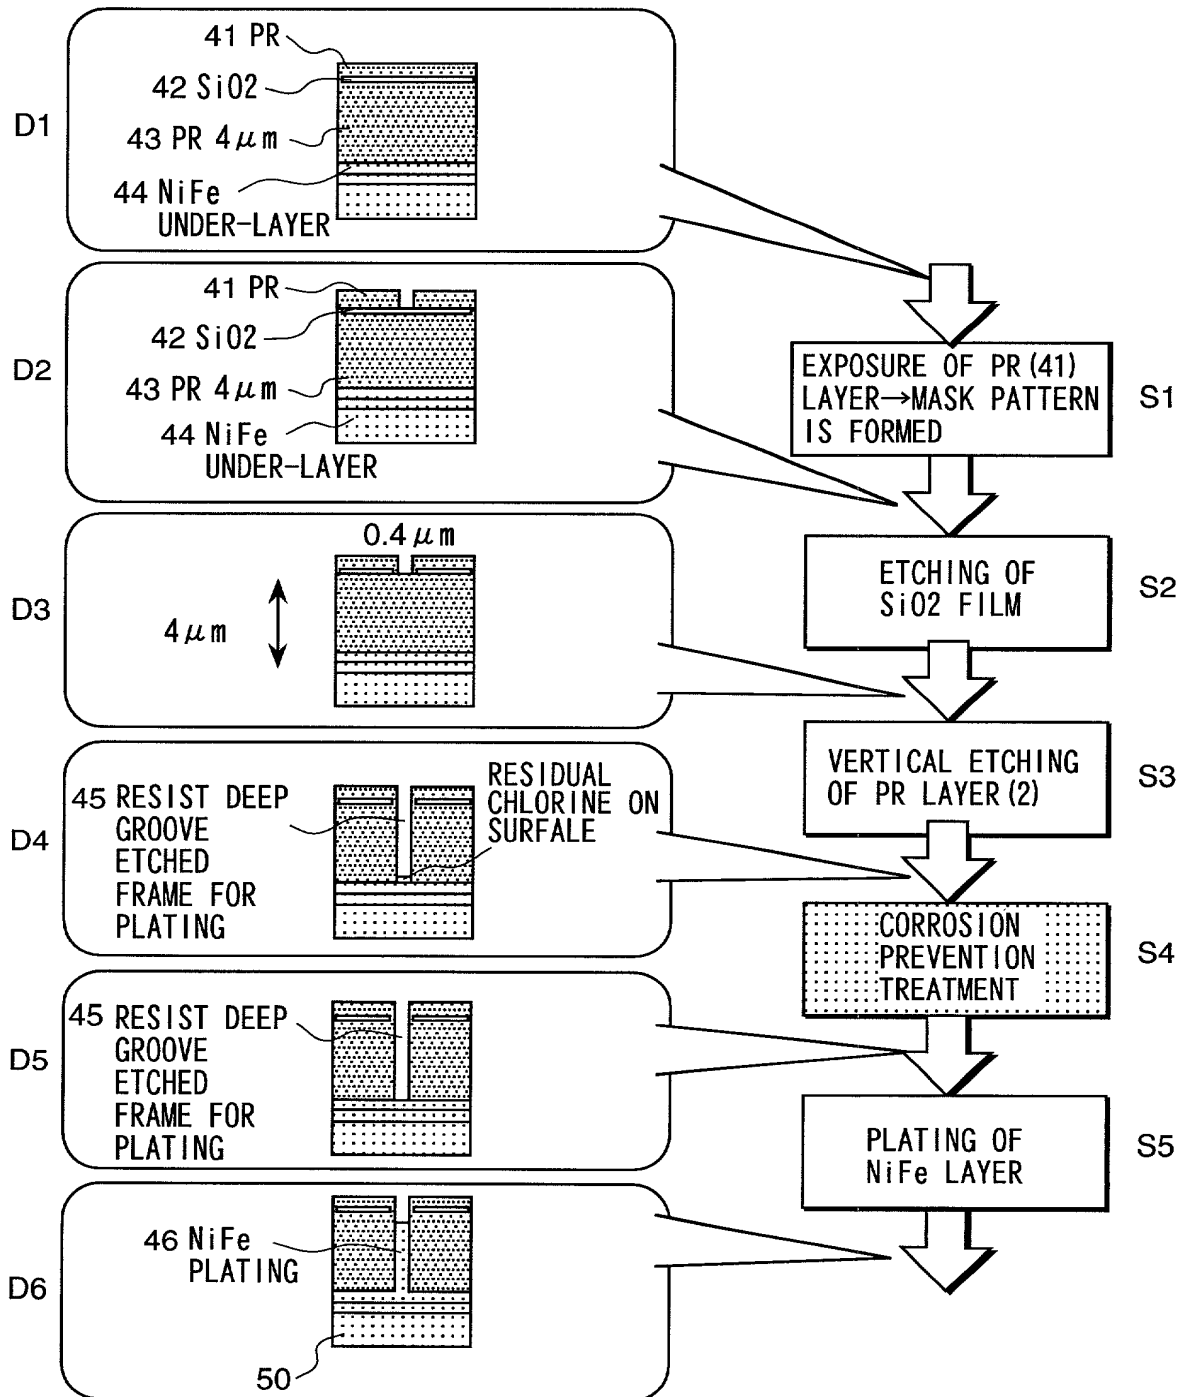


FIG.8

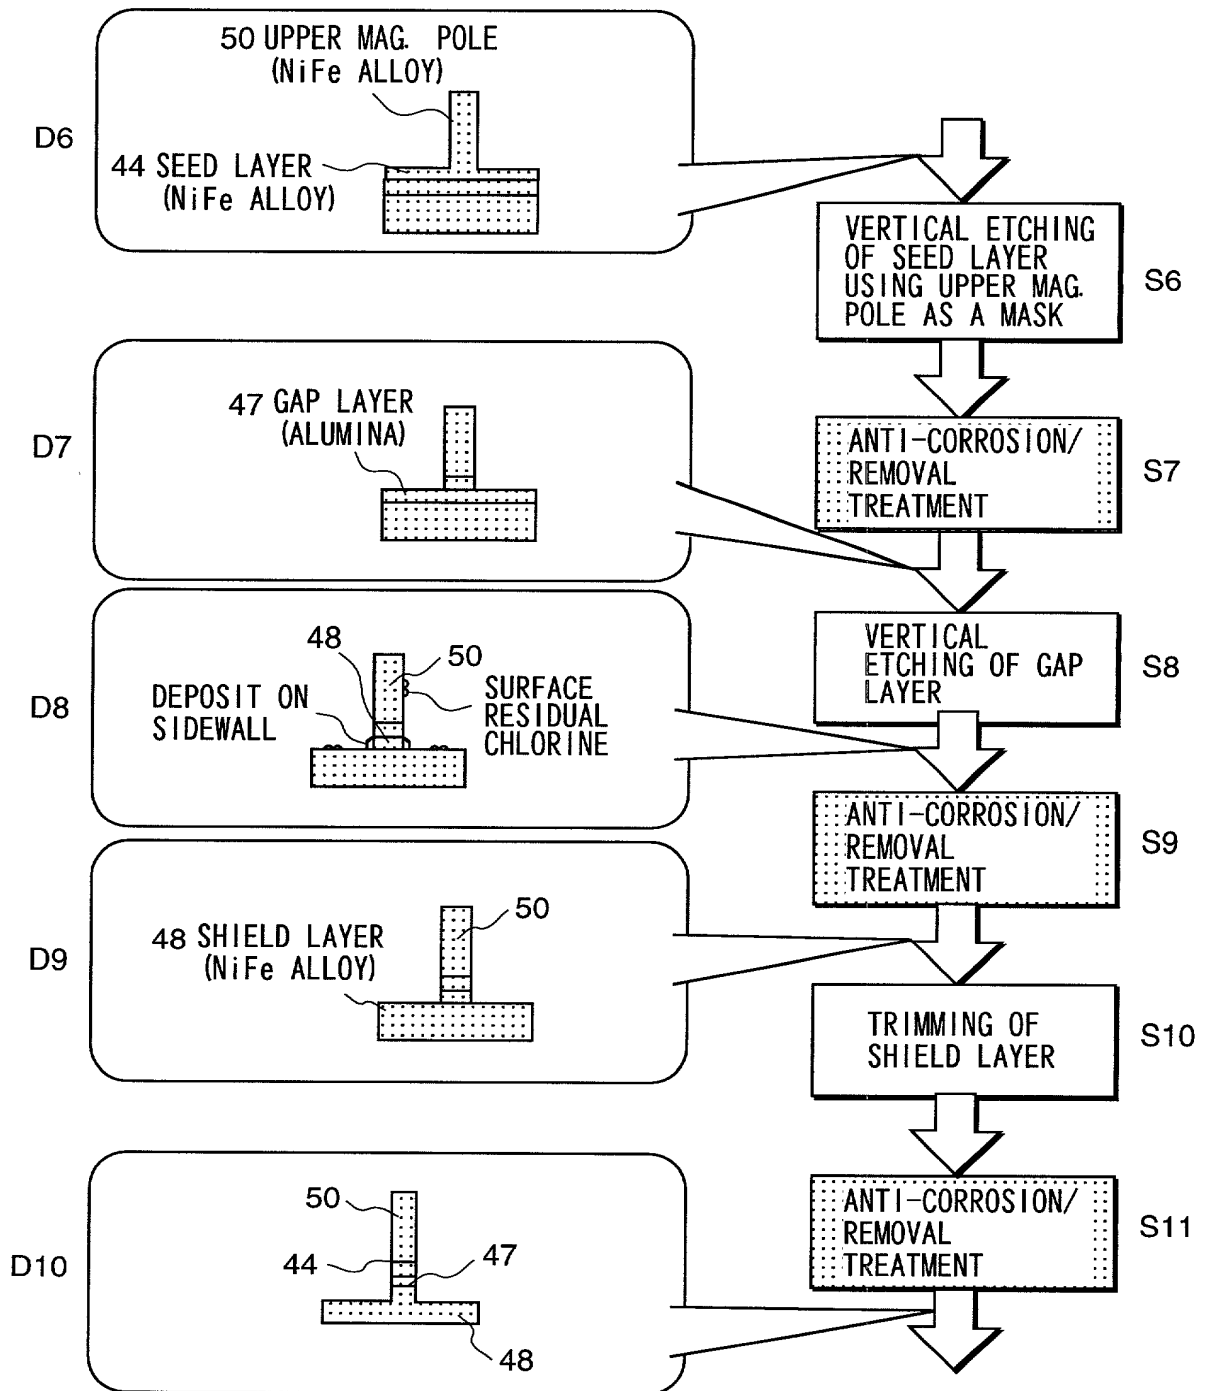


FIG. 9

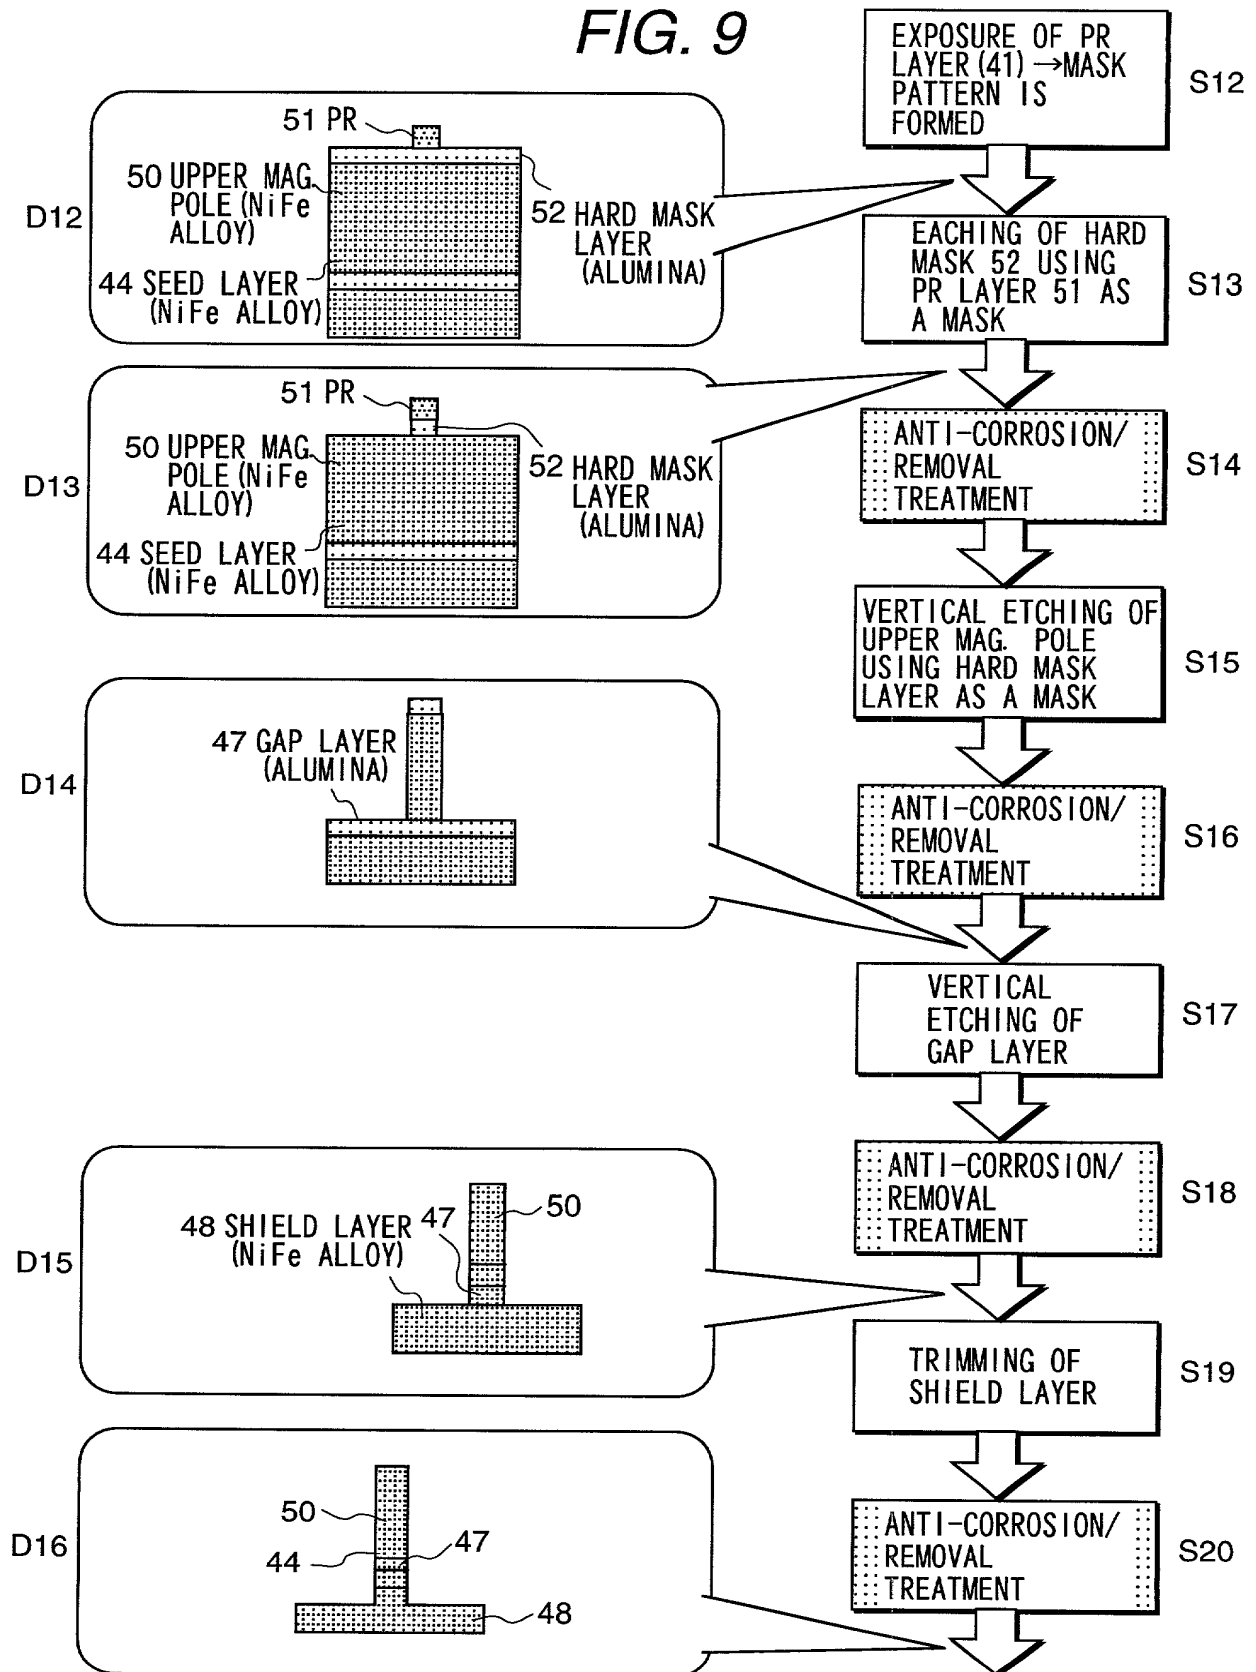


FIG.10

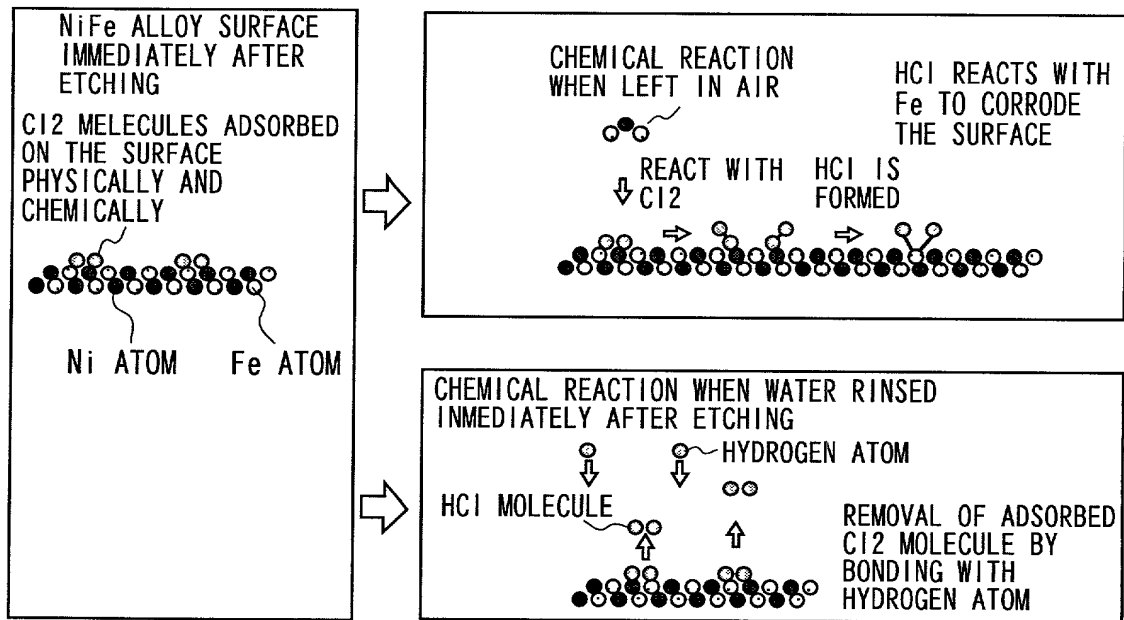


FIG.12





	BEFOR ETCHING	AFTER ETCHING
PLASMA ETCHING	 <p>GAP LAYER</p>	
MILLING	 <p>A LONGER INITIAL LENGTH OF UPPER MAGNETIC POLE NECESSIATED DUE TO LOW SELECTIMITY RATIO → DIFFICULT TO OBTAIN PRECISE SIZE CONTROL</p>	 <p>DIFFICULT TO OBTAIN VERTICAL PATTERN</p>

FIG.11

EXPERIMENTAL CONDITIONS*	TIME UNTIL CORROSION OCCURS
LEFT IN AIR AFTER ETCHING OF GAP LAYER	5 MIN.
LEFT IN AIR AFTER PURE WATER RINSING/DRYING WITHIN 2 MIN. AFTER ETCHING OF GAP LAYER	AFTER MORE THAN 2 WEEKS

ITEM	UNIT	RESULT
RATE	nm/min	108.5

***OTHER CONDITIONS**

ITEM	CONDITIONS
DEVICE STRUCTURES PRIOR TO & AFTER ETCHING	
GAS	Cl 20sccm+BCl3 30sccm
PRESSURE	0.3Pa
STAGE TEMP.	40°C
SOURCE RF POWER	750W
SOURCE RF FREQ.	13.56MHz
BIAS RF POWER	60W
BIAS RF FREQ.	800KHz

DECLARATION AND POWER OF ATTORNEY FOR PATENT APPLICATION

As a below named inventor, I hereby declare that:

My residence, post office address and citizenship are as stated below next to my name, I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled:

A METHOD OF PROCESSING SPECIMENS, AN APPARATUS THEREFOR AND

A METHOD OF MANUFACTURE OF A MAGNETIC HEAD

the specification of which (check one)

☒

is attached hereto.

☐

was filed on _____

as Application Serial No. _____

and was amended on _____

(if applicable)

I hereby state that I have reviewed and understand the contents of the above-identified specification, including the claims, as amended by any amendment referred to above.

I acknowledge the duty to disclose information which is material to the examination of this application in accordance with Title 37, Code of Federal Regulations, § 1.56(a).

I, hereby claim foreign priority benefits under Title 35, United States Code, § 119 of any foreign application(s) for patent or inventor's certificate listed below and have also identified below any foreign application for patent or inventor's certificate having a filing date before that of the application on which priority is claimed:

Prior Foreign Application(s)

Priority Claimed

<u>11-288657</u> (Number)	<u>Japan</u> (Country)	<u>08/10/1999</u> (Day/Month/Year Filed)	<input checked="" type="checkbox"/> Yes	<input type="checkbox"/> No
_____ (Number)	_____ (Country)	_____ (Day/Month/Year Filed)	<input type="checkbox"/> Yes	<input type="checkbox"/> No
_____ (Number)	_____ (Country)	_____ (Day/Month/Year Filed)	<input type="checkbox"/> Yes	<input type="checkbox"/> No
_____ (Number)	_____ (Country)	_____ (Day/Month/Year Filed)	<input type="checkbox"/> Yes	<input type="checkbox"/> No
_____ (Number)	_____ (Country)	_____ (Day/Month/Year Filed)	<input type="checkbox"/> Yes	<input type="checkbox"/> No
_____ (Number)	_____ (Country)	_____ (Day/Month/Year Filed)	<input type="checkbox"/> Yes	<input type="checkbox"/> No

I hereby claim the benefit under Title 35, United States Code, § 120 of any United States application(s) listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States application in the manner provided by the first paragraph of Title 35, United States Code, § 112, I acknowledge the duty to disclose material information as defined in Title 37, Code of Federal Regulations, § 1.56(a) which occurred between the filing date of the prior application and the national or PCT international filing date of this application:

_____ (Application Serial No.)	_____ (Filing Date)	_____ (Status: patented, pending, abandoned)
_____ (Application Serial No.)	_____ (Filing Date)	_____ (Status: patented, pending, abandoned)
_____ (Application Serial No.)	_____ (Filing Date)	_____ (Status: patented, pending, abandoned)
_____ (Application Serial No.)	_____ (Filing Date)	_____ (Status: patented, pending, abandoned)

(Continued on Page 2)

I hereby appoint as principal attorneys; Donald R. Antonelli, Reg. No. 20,296; David T. Terry, Reg. No. 20,178; Melvin Kraus, Reg. No. 22,466; Stanley A. Wal, Reg. No. 26,432; William I. Solomon, Reg. No. 28,565; Gregory E. Montone, Reg. No. 28,141; Ronald J. Shore, Reg. No. 28,577; Donald E. Stout, Reg. No. 26,422; Alan E. Schiavelli, Reg. No. 32,087; James N. Dresser, Reg. No. 22,973 and Carl I. Brundidge, Reg. No. 29,621 to prosecute and transact all business connected with this application and any related United States application and international applications. Please direct all communications to the following address:

Antonelli, Terry, Stout & Kraus
Suite 1800
1300 North Seventeenth Street
Arlington, Virginia 22209
Telephone: (703) 312-6600
Fax: (703) 312-6666

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further, that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United State Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

	(Full Name)	(Signature)
Date <u>January 13, 2000</u>	Inventor <u>Ken Yoshioka</u>	<u>Ken Yoshioka</u>
Residence <u>Same as Post Office Address</u>		Citizenship <u>Japan</u>
Post Office Address <u>7-789-22, Nijigaoka, hikari-shi, Yamaguchi 747-0031, Japan</u>		
Date <u>January 18, 2000</u>	Inventor <u>Yoshimi Torii</u>	<u>Yoshimi Torii</u>
Residence <u>Same as Post Office Address</u>		Citizenship <u>Japan</u>
Post Office Address <u>2-31-8, Fujimidai, Nerima-ku, Tokyo 177-0034, Japan</u>		
Date <u>January 13, 2000</u>	Inventor <u>Moriaki Fuyama</u>	<u>Moriaki Fuyama</u>
Residence <u>Same as Post Office Address</u>		Citizenship <u>Japan</u>
Post Office Address <u>10-2, Suwa-cho 5-chome, Hitachi-shi, Ibaraki 316-0001, Japan</u>		
Date <u>January 13, 2000</u>	Inventor <u>Tomohiro Okada</u>	<u>Tomohiro Okada</u>
Residence <u>Same as Post Office Address</u>		Citizenship <u>Japan</u>
Post Office Address <u>785, Kamonomiya, Odawara-shi, Kanagawa 250-0874, Japan</u>		
Date <u>January 13, 2000</u>	Inventor <u>Saburou Kanai</u>	<u>Saburou Kanai</u>
Residence <u>Same as Post Office Address</u>		Citizenship <u>Japan</u>
Post Office Address <u>6-7-7, Nijigaoka, Hikari-shi, Yamaguchi 743-0031, Japan</u>		
Date <u>January 13, 2000</u>	Inventor <u>Takehito Usui</u>	<u>Takehito Usui</u>
Residence <u>Same as Post Office Address</u>		Citizenship <u>Japan</u>
Post Office Address <u>1-16-10, Inayoshiminami, Chiyoda-machi, Niihari-gun, Ibaraki 315-0055, Japan</u>		
Date <u>January 18, 2000</u>	Inventor <u>Hitoshi Harata</u>	<u>Harata Hitoshi</u>
Residence <u>Same as Post Office Address</u>		Citizenship <u>Japan</u>
Post Office Address <u>2-4-52, Satsuki, Utsunomiya-shi, Tochigi 321-0141, Japan</u>		
Date _____	Inventor _____	
Residence _____		Citizenship _____
Post Office Address _____		
Date _____	Inventor _____	
Residence _____		Citizenship _____
Post Office Address _____		
Date _____	Inventor _____	
Residence _____		Citizenship _____
Post Office Address _____		